

FO Inside/Out - Customer Lead in Cable

Openreach Description: FO Inside Outside


Item code: 100627 - 2.9mm inner 5mm outer. RIP CORD - 5m

Item code: 100628 - 2.9mm inner 5mm outer. RIP CORD - 10m

Item code: 100629 - 2.9mm inner 5mm outer. RIP CORD - 20m


Item code: 100630 - 2.9mm inner 5mm outer. RIP CORD - 30m

Item code: 100631 - 2.9mm inner 5mm outer. RIP CORD - 50m

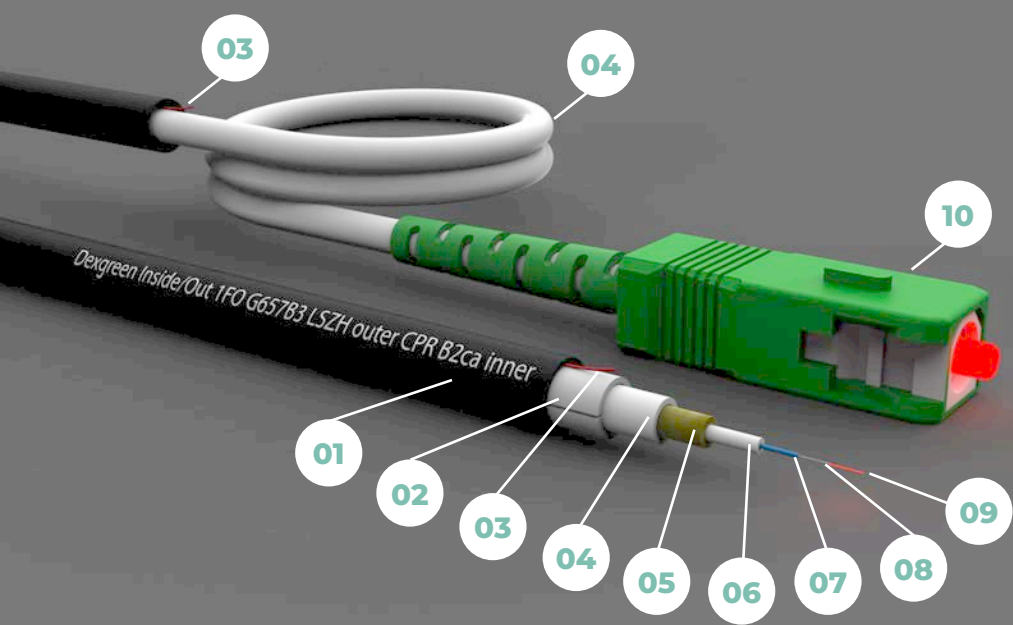


FO Inside/Out - Customer Lead in Cable Structure & Features


- 01** [Outer sheath](#) - Material: 5mm in diameter LSZH which is easy to strip by hand. UV resistant and water repellent.
- 02** [Water blocking tape](#) - Moisture barrier & prevents inner and outer sheathing from sticking together.
- 03** [Ripcord](#) - Facilitate easier stripping of outer sheathing. The cable can be peeled by hand. Nominal exposed ripcord length of 240mm.
- 04** [Inner sheath](#) -CPR Euroclass B2ca (s1b d1 a2). Material: white 2.9mm in diameter LSZH. Meets all internal cabling building regulations.
- 05** [Aramid strength member/ Kevlar](#) - Gives inner sheathing strength for bending within the house and tacking various surfaces.
- 06** [Module](#) - 900um
- 07** [Fibre](#) - Primary Coating
- 08** [Fibre](#) - Cladding
- 09** [Fibre](#) - Core: G657.B3 fibre type (bending insensitive).
- 10** [Connectorized](#) at one end for quick & more reliable connection with factory tested SC/APC connector.

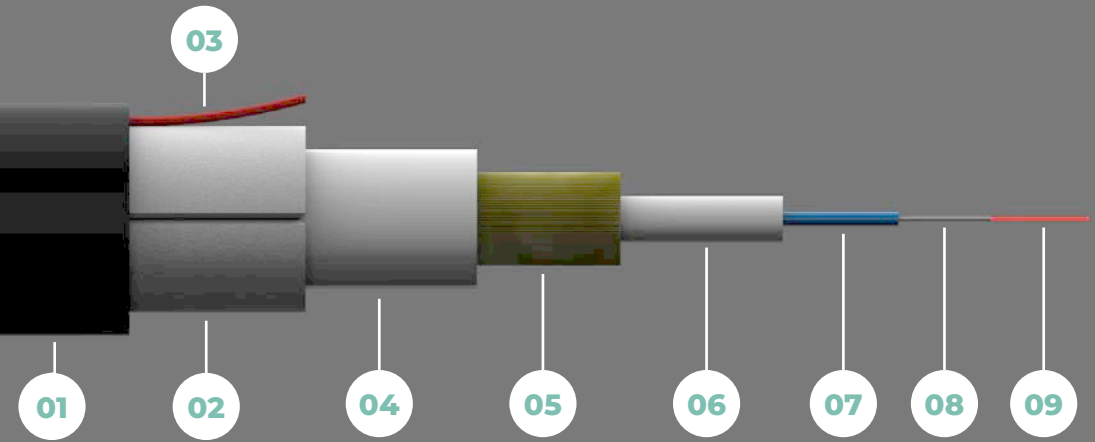

FO Inside/Out - Cable Structure Side View (Reference PG.1)

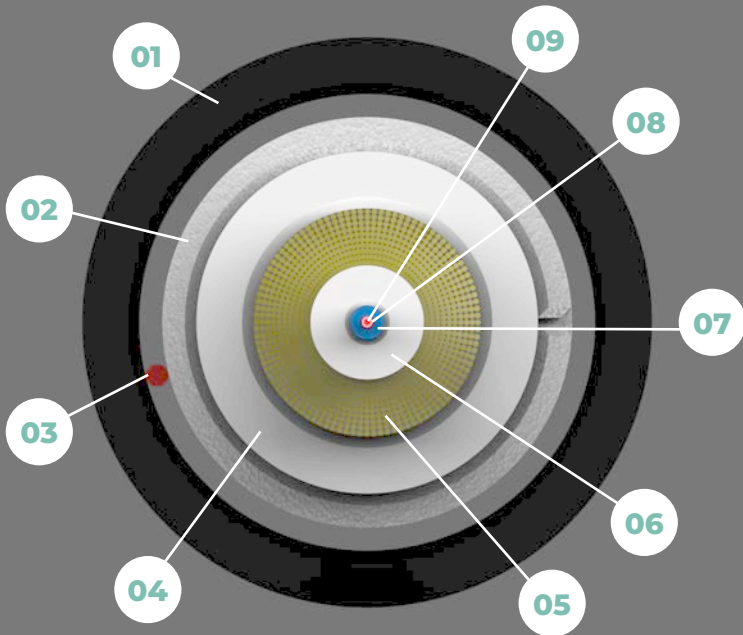

FO Inside/Out - Cable Structure Plan View (Reference PG.1)

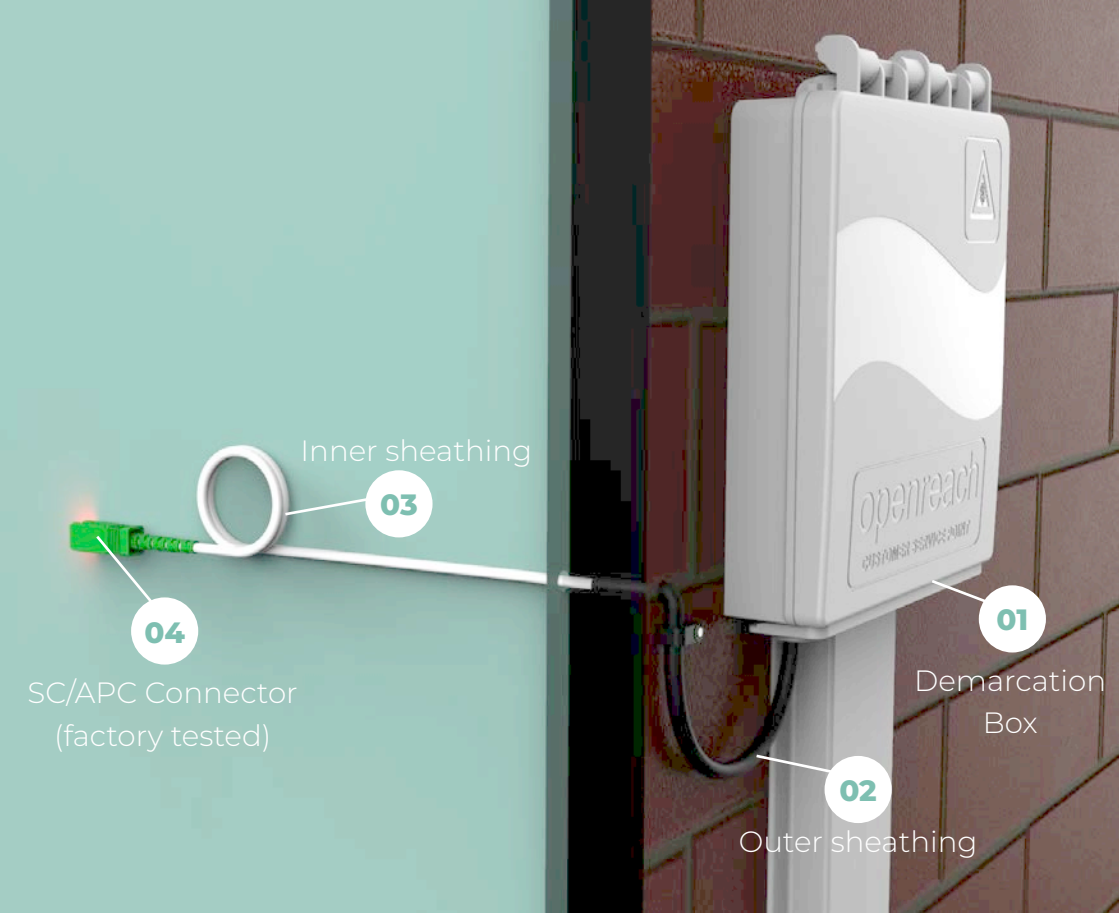

Inner sheathing
03

04
SC/APC Connector
(factory tested)

01
Demarcation
Box

02
Outer sheathing

FO Inside/Out - Customer Lead in Cable Application

For more information regarding this product,
please scan the QR code attached:

